

See **Page 2** for Product Specification

### Electrical Requirements

415v, 2.2kw three phase and neutral terminated in an isolator at the lower level

### Additional Site Requirements

Drawn By:  
Terry.Brocklehurst

Checked By:

Title:  
Mezz HD Assembly

### CUSTOMER APPROVAL SIGNATURE

UNLESS STATED OTHERWISE, GENERAL TOLERANCES TO ISO 2768 TOLERANCE CLASS 'm' FOR MACHINING & 'V' FOR FABRICATION

Customer Ref.

PH Job Number

Approved by - Date

Quantity

Date  
20/08/2014

Design State  
WorkInProgress

©2015 This drawing is the property of Penny Hydraulics Limited and must not be copied or amended in part or in whole unless prior express written permission is obtained from the Company

Dimensions  
mm

Material

Scale on A3  
1:38  
Projection  
☒ ☐

Drg No.

\_MEZZI\_QUOTE - 1T

Edition

Sheet Number


Part No

Reference

1 of 2

## Product Specification

Operation	Lifting and lowering GOODS ONLY (no passengers)
Maximum Working Load	1000kg
Number of Stops	2 (Ground + 1)
Travel	Ground to First Floor - up to 4.2m
Usable Platform Size	1500mm x 1500mm
Platform Guarding	900mm high sides on non-loading edges
Lift Speed	0.2 m/s
Power Supply Required	415v, 2.2kW, three phase and neutral supply terminated in an isolator at the lower level
Controls	Hold to run push buttons with emergency stop at both landings
Drive Type	Hydraulics Ram
Power Pack	Mounted remotely to suit application on a floor mounted stand
Loading Configuration	Same side or load through arrangements
Closed Height	75 mm platform thickness
Ramp	1000mm ramp available (or sump)
Lift Pit	2600mm x 1860mm sump to be created by customer (or ramp by Penny Hydraulics)
External Shaft Footprint	2600mm x 1820 (load through) or 2600mm x 1860mm (same side loading)
Shaft Enclosure	Self supporting steel frame, 1" x 1" mesh filled
Door Type	2000mm high double mesh filled gates, electrically interlocked to prevent gates being opened unless platform is docked at appropriate landing
Lift & Guard Colour	Standard matt black
Documentation	CE Mark and Declaration of Conformity Operation and Maintenance Manual issue on completion LOLER Report of Thorough Examination and Test issued on commissioning
Training	Operator training carried out on completion
Duty Cycles	Based on 10 cycles per hour on a single shift basis
Warranty	12 months parts and labour for customers in the U.K. mainland only. Others are on a parts only basis.
Weight (excluding load)	

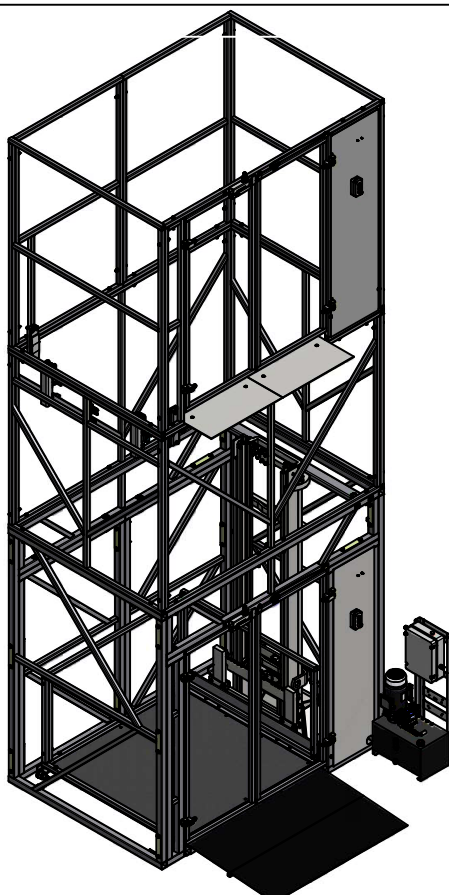

CAD version of your Lift