



SPILL FLOORING

BF4 KITS

- These kits provide a 3320mm x 2520mm fully contained 4 section rectangular low profile (150mm) storage/sump working area. They come complete with sump connectors (BFC) (holes are pre-drilled) and joining strips (BFS2 or BFS4).
- All models are covered by the Romold® 3 year guarantee.

BF4KIT1

Comprises: 4 x BF4, 2 x BFS2, 2 x BFS4 & 4 x BFC

Overall size: 3320 x 2520 x 150mm (square configuration)



BF4KIT2

Comprises: 4 x BF4, 3 x BFS4 & 3 x BFC

Overall size: 5040 x 1660 x 150mm ("oblong" configuration)



BFS2

BFS2 and BFS4 are different length metal joining strips used to secure sections of sump flooring together and stop them separating when in situ



BFS4



BFC

BFC is a 1" BSP threaded sump connector (supplied in a pack of 2) that allows you to share the sump capacities of the sump flooring

BFR2

Ramp for use with the BF4KIT1, BF4KIT2, BF2, BF4 or BF4S




CODE	SIZE (LxWxH)	SUMP CAPACITY	DIBt APPROVAL	UDL	WEIGHT
BF4KIT1 & BF4KIT2	1660 x 1260 x 150mm	300ltr per section 1200ltr per kit	Y	2000kg per section	38kg per section

CODE	SIZE (LxWxH)	UDL	WEIGHT
BFR	650 x 800 x 160mm	1000kg	8kg
BFR2	1740 x 1000 x 160mm	1000kg	28kg
BFS2	1260 x 60 x 35mm	-	1.5kg
BFS4	1660 x 60 x 35mm	-	2kg
BFC	79 x 40mm (dia)	-	0.6kg




BF4

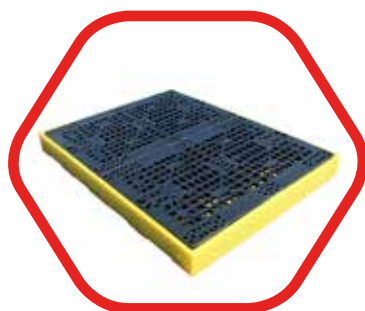

BF2



BFR

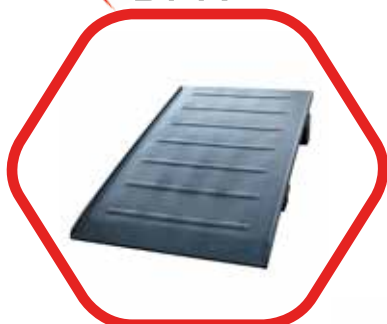

BF4S



BF4X



A low profile 4-drum floor tray.
150mm high with additional bracing

SPILL FLOORING

- A flexible decking solution for creating temporary workstations.
- Low profile spill flooring can be used individually or joined together to create larger sumped areas.
- All models have removable grids for easy access when the sump needs cleaning.
- Sump capacities when joined together can comply with storage regulations.

CODE	SIZE (LxWxH)	DIBt APPROVAL	SUMP CAPACITY	POLY MESH FLOOR	WEIGHT
BF2	1260 x 860 x 150mm	Y	130ltr	Standard	20kg
BF4	1660 x 1260 x 150mm	Y	300ltr	Standard	38kg
BF4S	2610 x 895 x 150mm	Y	300ltr	Standard	42kg
BF4X	1310 x 1310 x 150mm	N	75ltr	Standard	32kg